

1c515 U.S. PTO
05/04/98

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
UTILITY PATENT APPLICATION TRANSMITTAL LETTER

Atty./Agent Docket No.: MCG00215

Mailing Date: April 29, 1998

Express Mail Label No.: _____

To: Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing under 37 CFR 1.53 (b) is a Nonprovisional Utility Patent:

☒ New Application; or a _____ Continuation, _____ Division, or _____ Continuation-in-Part (CIP)
Application of prior US application No. _____ / _____, filed on _____, having US
Examiner _____, in Group Art Unit _____: of

Inventor(s): Jurgen Reinold; David Knappenberger; Mathew Cucuzella; Jack Scott Geranen;
Jeff Lee; and Michael E. Williams

For (Title): METHOD AND SYSTEM FOR DISTRIBUTING DIGITAL AUDIO AND VIDEO TO AN
ANALOG WIRELESS DEVICE

This transmittal letter has 2 total pages.

Enclosed are:

☒ 3 sheets of drawings, along with 26 pages of specification and claims,

☒ Oath or Declaration Combined with Power of Attorney (3 pages)

☒ Newly Executed (original or copy)

_____ Copy from a prior application (if this is a Continuation/Division with no new matter)

_____ Statement deleting named inventor(s) in prior application if this is a

_____ Continuation/Division (See 37 CFR 1.63(d)(2) and 1.33(b).)

_____ Consider as the above Statement, Please delete as inventors for this application
the following inventors named in the prior application: _____

_____ A certified copy of a _____ (non-US) application
S/N _____ / _____, having a filing date of _____, and foreign priority to
this non-US application for the present application is hereby claimed under 35 USC 119.

☒ An Assignment Transmittal Letter and Assignment of the invention to MOTOROLA, INC.

_____ An Information Disclosure Statement (IDS), with _____ PTO-1449, and
_____ citation copies.

_____ Preliminary Amendment

☒ Return Receipt Postcard

_____ Petition For Extension of Time for parent application of the present Continuation/Division/CIP
application

Instructions:

 Incorporation by Reference (for Continuation/Division application) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

 Since the present application is based on a prior US application, please amend the specification by adding the following sentence before the first sentence of the specification: "The present application is based on prior US application No. / , filed on , which is hereby incorporated by reference, and priority thereto for common subject matter is hereby claimed."

 Please cancel filed claims .

 X The filing fee is calculated as follows:

CLAIMS AS FILED, LESS ANY CANCELED BY AMENDMENT

	NUMBER OF CLAIMS	NUMBER EXTRA	RATE	FEE
TOTAL CLAIMS	30- 20 =	10	X \$22	= \$220.00
INDEPENDENT CLAIMS	6- 3 =	3	X \$82	= \$246.00
MULTIPLE DEPENDENT CLAIMS			\$270	= \$ 0.00
BASIC FEE				= \$ 790.00
TOTAL FILING FEE				= \$ 1256.00

 X Please charge Deposit Account No. 13-4772 in the amount of \$ 1256.00 for the Total Filing Fee. Two duplicate copies of this sheet are enclosed.

 X The Commissioner is hereby authorized to charge any additional fees which may be required now or in the future under 37 CFR 1.16 or 37 CFR 1.17, including any present or future time extension fees which may be required, or credit any overpayment to Deposit Account No. 13-4772. Two duplicate copies of this sheet are enclosed.

Date: 4/29/98

Signature: S. Kevin Pickens

Please forward all correspondence to:
 Vincent Ingrassia
 Motorola, Inc.
 Intellectual Property Department
 P.O. Box 10219
 Scottsdale, AZ 85271-0219

Printed Name: S. Kevin Pickens
 Attorney for Applicant(s)
 Registration No. 34,696
 MOTOROLA, INC.
 Phone: (602) 441-4207
 Fax: (602) 441-5220

METHOD AND SYSTEM FOR DISTRIBUTING DIGITAL AUDIO AND
VIDEO TO AN ANALOG WIRELINE DEVICE

5

Related Inventions

The present invention is related to the following
inventions which are assigned to the same assignee as the
10 present invention:

Method and System for Broadcasting Digital Audio and
Video to an Analog Wireless Device, filed_____,
having serial no. (Docket MCG00216) .

15

Method and System for Broadcasting Digital Audio and
Video to a Digital Wireless Device, filed_____,
having serial no. (Docket MCG00214) .

20 Method and System for Distributing Digital Audio and
Video to a Digital Wireline Device, filed_____,
having serial no. (Docket MCG00213) .

Method and System for Broadcasting/Distributing Digital
25 Audio and Video to a Television, filed_____,
having serial no. (Docket MCG00224) .

Method and System for Broadcasting Digital Audio to a
Radio, filed_____, having serial no. (Docket
30 MCG00225) .

Field of the Invention

- 5 The present invention relates generally to digital audio and video.

Background of the Invention

10

A wide variety of digital audio and video content currently exists. For example, computers can process or store audio and video data obtained via the internet and other sources. Consumption of digital audio and video is currently confined, however, to devices designed to accept a specific form of input. For example, a computer can play digital audio and video provided in a specific digital format which the computer is configured to process, but a current television cannot play the same digital audio and video data because it is designed to receive an entirely different form of input. Accordingly, it would be desirable to have the capability of playing digital audio and video with devices designed to receive a different form of input.

25

Brief Description of the Drawings

FIG. 1 is a circuit diagram of a system for broadcasting audio and video to an analog device;

5

FIG. 2 is a flowchart of the process performed by the system shown in FIG. 1;

FIG. 3 is a flowchart of the process for processing a digital audio signal;

10

FIG. 4 is a flowchart of the process for processing a digital video signal; and

FIG. 5 is a flowchart of the process for outputting the digital audio and video to the analog device.

15

20

Detailed Description of the Drawings

In a preferred embodiment of the invention, a method and system is provided for distributing digital audio and/or video to an analog wireline device. More specifically, the preferred embodiment of the invention obtains digital audio and/or video signals and distributes the audio and video content of the digital signals to the analog wireline device. As a result, an analog wireline device which is not designed to receive digital audio or video can play the audio and/or video content.

25

30

In one aspect of the preferred embodiment, an audio circuit distributes an analog audio signal to the analog wireline device. An audio input interface receives a digital audio signal and identifies an audio bitstream.

5 Optionally, an audio digital decryption unit decrypts the audio bitstream. An audio decoding unit then decodes the audio bitstream. The audio decoding unit optionally includes a decompression component decompressing the audio bitstream. An audio digital to analog converter
10 converts the decoded audio bitstream to an analog audio signal. Optionally, an audio analog decryption unit decrypts the analog audio signal. An audio output interface distributes the analog audio signal to the analog wireline device.

15 In another aspect of the preferred embodiment, a video circuit distributes an analog video signal to the analog wireline device. A video input interface receives a digital video signal and identifies a video bitstream.
20 Optionally, a video digital decryption unit decrypts the video bitstream. A video decoding unit then decodes the video bitstream. The video decoding unit optionally includes a decompression component decompressing the video bitstream. A video digital to analog converter
25 converts the decoded video bitstream to an analog video signal. Optionally, a video analog decryption unit decrypts the analog video signal. A video output interface distributes the analog video signal to the analog wireline device.

30 In yet another aspect of the preferred embodiment, the audio circuit and video circuit are combined to

5 distribute the analog audio signal and analog video
signal. An audio input interface receives a digital audio
signal and identifies an audio bitstream. Optionally, an
audio digital decryption unit decrypts the audio
10 bitstream. An audio decoding unit then decodes the audio
bitstream. The audio decoding unit optionally includes a
decompression component decompressing the audio
bitstream. An audio digital to analog converter converts
the decoded audio bitstream to an analog audio signal.
15 Optionally, an audio analog decryption unit decrypts the
analog audio signal. A video input interface receives a
digital video signal and identifies a video bitstream.
Optionally, a video digital decryption unit decrypts the
video bitstream. A video decoding unit then decodes the
20 video bitstream. The video decoding unit optionally
includes a decompression component decompressing the
video bitstream. A video digital to analog converter
converts the decoded video bitstream to an analog video
signal. Optionally, a video analog decryption unit
25 decrypts the analog video signal. An audio output
interface distributes the analog audio signal to the
analog wireline device, and a video output interface
distributes the analog video signal to the analog
wireline device. A synchronization unit synchronizes the
output of the analog audio signal and analog video
signal.

FIG. 1 is a circuit diagram of a system for broadcasting
both audio and video to an analog device. In FIG. 1, an
30 audio circuit 120 obtains a digital audio signal and
produces an analog audio signal which can be distributed
to an analog wireline device 100 or broadcast to an

analog wireless device 110. The analog wireline device 100 is, for example, any one or more of a number of devices including, but not limited to, a cassette recorder, television, video cassette recorder, amplifier, or amplified speakers. The analog wireless device 110 is, for example, any one or more of a number of devices including, but not limited to, a radio, television, cordless telephone or wireless speakers.

10 The audio circuit 120 contains an audio input interface 122, an optional audio digital decryption unit 123, an audio decoding unit 124, an audio digital to analog converter 126, an optional audio analog decryption unit 127 and an audio output interface 128. One of ordinary skill in the art will implement these components using circuitry best suited to the application at hand. For example, each of the components may be implemented with one or more chips or with software executed by a processor contained therein or in another component of the system shown in FIG. 1, such as a control unit 130, which will be described in more detail below. The functions of these components will be explained in greater detail with references to the flowcharts below.

25 Similarly, a video circuit 140 obtains a digital video signal and produces an analog video signal which can be distributed to the analog wireline device 100 or broadcast to the analog wireless device 110. The video circuit contains a video input interface 142, an optional video digital decryption unit 143, a video decoding unit 144, a video digital to analog converter 146, an optional video analog decryption unit 147 and a video output

interface 148. One of ordinary skill in the art will implement these components using circuitry best suited to the application at hand. For example, each of the components may be implemented with one or more chips or
5 with software executed by a processor contained therein, or in another component of the system shown in FIG. 1, such as the control unit 130. The functions of these components will be explained in greater detail with reference to the flowcharts below.

10

An analog transmitter 150 mixes the analog audio signal and analog video signal into an analog wireless output signal and transmits the analog wireless output signal to the analog wireless device 110. For example, where the
15 analog wireless device 110 is a radio, the analog transmitter 150 transmits an analog audio signal in the FM or AM band. When both audio and video content are present, a synchronization unit 160 synchronizes processing by the audio circuit 120 and the video circuit
20 140 to synchronize the output to the analog wireless device 110. If the audio and video are provided as an integrated digital input signal, a splitter 170 separates the digital input signal into the digital audio signal received by the audio circuit 120 and the digital video
25 signal received by the video circuit 140.

The control unit 130 obtains input from a user and controls the audio circuit 120 to play audio and the video circuit 140 to play video in accordance with the
30 user input. The control unit 130 obtains input from a user and controls the audio circuit 120 to process the digital audio signal and the video circuit 140 to process

the digital video signal in accordance with the user input. One of ordinary skill in the art will readily implement the control unit 130 in any of a number of different ways, depending on the environment and end
5 device to which the system is applied. For example, where the analog wireless device 110 is a radio, the control unit 130 can be implemented as a control panel or remote control device which obtains a frequency selection from a user and controls the analog transmitter to
10 transmit the analog audio signal at the radio frequency selected by the user. The control unit could also obtain a selection of the AM or FM band by the user. As another example, where the analog wireless device 110 is a television, the control unit 130 can be implemented as a
15 control panel or remote control device which obtains a channel or television frequency selection from a user and controls the analog transmitter to transmit the analog wireless output signal at the television frequency or channel selected by the user. The control unit 130 can
20 also provide for selection from a number of different possible input sources and formats, and for selection from among one or more end devices.

FIG. 2 is a flowchart of the process performed by the
25 system shown in FIG. 1. In step 205, the system obtains a digital input signal. The digital input signal may be an integrated audio/video signal or a separate digital audio signal and digital video signal. If the digital input signal is determined in step 210 to be an
30 integrated audio/video signal, the splitter 170 splits the signal in step 215 into a digital audio signal and a digital video signal. The digital audio signal and

digital video signal are then processed in step 220 by the audio circuit 120 and the video circuit 140, respectively.

5 FIG. 3 is a flowchart of the process performed by the audio circuit 120 to process the digital audio signal in accordance with step 220. In step 305, the audio input interface 122 receives the digital audio signal and identifies an audio bitstream within the digital audio
10 signal. The digital audio signal contains audio data from any of a number of possible sources. For example, the audio input interface 122 can receive the digital audio signal from a network such as via the internet or an intranet. As another example, the audio input
15 interface 122 can receive the digital audio signal from a local storage device, such as a CD-ROM, DVD or hard disk. As yet another example, the digital audio signal can be produced by a computer application such as a text-to-speech application or a digital musical instrument.

20 One of ordinary skill in the art will readily implement the audio input interface 122 to receive a digital audio signal in any of a number of possible formats from any of a number of possible sources. The audio input interface
25 122 can be implemented, for example, using physical layer interface types such as USB, IEEE 1394-1995 and IEEE 802.x, and using protocols such as HTTP, TCP/IP, and UDP/IP. Depending on the source and format of the digital audio signal, the audio input interface 122
30 performs other functions in addition to identifying the audio bitstream. Such functions include, but are not necessarily limited to, physical layer functions such as

error correction, etc., transport layer functions such as device addressing, etc., session layer functions such as content provider selection, and so forth.

5 If the audio bitstream is determined in step 310 to have been digitally encrypted, the audio digital decryption unit 123 digitally decrypts the audio bitstream in step 315. Possible applications of the invention described herein may require the digital audio signal to be
10 digitally encrypted so that only authorized devices can use the audio content therein, such as premium channels, classified information, copy protection, and pay-per-listen content. The control unit 130 controls the audio digital decryption unit 123 to decrypt only authorized
15 digital audio. One of ordinary skill in the art will readily implement the audio digital decryption unit 123 utilizing available hardware, software, and so forth.

In step 320, the audio decoding unit 124 decodes the
20 audio bitstream. One of ordinary skill in the art will implement the audio decoding unit 124 based on the environment and application at hand, utilizing available hardware, software, etc. to decode the data based on any of a number of possible encoding methods with which the
25 audio bitstream has been encoded. Such encoding methods include, but are not limited to, ADPCM, CD-DA, ITU G.711, G.722, G.723 & G.728, MPEG I, II & III, AC-3, AIFF, AIFC, AU, Pure Voice, Real Audio and WAV. Depending on the encoding method, data compression may also be
30 included, in which case step 320 includes the step of decompressing the audio bitstream and the audio decoding unit 124 includes a decompression component.

In step 325, the audio digital to analog converter 126 converts the audio bitstream to an analog audio signal. One of ordinary skill in the art will readily implement the audio digital to analog converter 126 utilizing an available digital to analog converter. If the analog audio signal is determined in step 330 to have been analog encrypted, then the audio analog decryption unit 127 decrypts the analog audio signal in step 335. Possible applications of the invention described herein require the analog audio signal to be analog encrypted so that only authorized devices can use the analog audio or because the audio content is copy protected. The control unit 130 controls the audio analog decryption unit 127 to decrypt only authorized digital audio.

FIG. 4 is a flowchart of the process performed by the video circuit 140 to process the digital video signal in accordance with step 220. The process is essentially the same as that performed by the audio circuit 120 to process the digital audio signal. In step 405, the video input interface 142 receives the digital video signal and identifies a video bitstream within the digital video signal. The digital video signal contains video data from any of a number of possible sources. For example, the video input interface 142 can receive the digital video signal from a network such as via the internet or an intranet. As another example, the video input interface 142 can receive the digital video signal from a local storage device, such as a CD-ROM, DVD or hard disk. As yet another example, the digital video signal can be produced by a digital video camera.

One of ordinary skill in the art will readily implement the video input interface 142 to receive a digital video signal in any of a number of possible formats from any of a number of possible sources. The video input interface 142 can be implemented, for example, using physical layer interface types such as USB, IEEE 1394-1995 and IEEE 802.x, and using protocols such as HTTP, TCP/IP, and UDP/IP. Depending on the source and format of the digital video signal, the video input interface 142 performs other functions in addition to identifying the video bitstream. Such functions include, but are not necessarily limited to, physical layer functions such as error correction, etc., transport layer functions such as device addressing, etc., session layer functions such as content provider selection, and so forth.

If the video bitstream is determined in step 410 to have been digitally encrypted, the video digital decryption unit 143 digitally decrypts the video bitstream in step 415. Possible applications of the invention described herein may require the digital video signal to be digitally encrypted so that only authorized devices can use the video content therein, such as premium channels, classified information, copy protection, and pay-per-view content. The control unit 130 controls the video digital decryption unit 143 to decrypt only authorized digital video. One of ordinary skill in the art will readily implement the video digital decryption unit 143 utilizing available hardware, software, and so forth.

In step 420, the video decoding unit 144 decodes the video bitstream. One of ordinary skill in the art will implement the video decoding unit 144 based on the environment and application at hand, utilizing available
5 hardware, software, etc. to decode the data based on any of a number of possible encoding methods with which the video bitstream has been encoded. Such encoding methods include, but are not limited to, ITU H.261 & H.263, Motion JPEG, MPEG-1, MPEG-2 and MPEG-4, Cinepak,
10 ClearVideo, Sony DV, Indeo, Real Video, Sorensen and VDOlive. Depending on the encoding method, data compression may also be included, in which case step 420 includes the step of decompressing the video bitstream and the video decoding unit 144 includes a decompression
15 component.

In step 425, the video digital to analog converter 146 converts the video bitstream to an analog video signal. One of ordinary skill in the art will readily implement
20 the video digital to analog converter 146 utilizing an available digital to analog converter. If the analog video signal is determined in step 430 to have been analog encrypted, then the video analog decryption unit 147 decrypts the analog video signal in step 435.
25 Possible applications of the invention described herein may require the analog video signal to be analog encrypted so that only authorized devices can use the analog video or because the video content is copy protected. The control unit 130 controls the video analog
30 decryption unit 147 to decrypt only authorized digital video.

Returning now to FIG.2, upon processing the digital audio signal and digital video signal in step 220, the system outputs in step 225 the appropriate analog signal to the end device. FIG. 5 is a flowchart of this output process. The system determines in step 505 whether the end device is an analog wireline device 100 or an analog wireless device 110. If the end device is an analog wireline device 100, then the audio output interface 128 distributes in step 510 the analog audio signal and the video output interface 148 distributes the analog video signal to the analog wireline device 100 via wireline. One of ordinary skill in the art will readily implement the audio output interface 128 and video output interface 148 utilizing available hardware, software, etc. to provide the appropriately formatted wireline signals, depending on the input format expected by the analog wireline device 100. For example, the audio output interface 128 can distribute the analog audio signal to a cassette recorder, amplifier or amplified speakers using a standard line out connection. Similarly, the video output interface 148 can distribute the analog video signal to a television or video cassette recorder using a standard Composite Video or S-Video connection. One of ordinary skill in the art will also readily extend the implementation to distribute the analog audio signal and/or analog video signal to multiple devices, as desired for the application at hand.

If the end device is an analog wireless device 110, then the analog transmitter 150 mixes in step 515 the analog audio signal and the analog video signal to produce an analog wireless output signal and transmits in step 520

the analog wireless output signal to the analog wireless device 110. One of ordinary skill in the art will readily implement the analog transmitter to provide the appropriately formatted wireless signals, depending on the input format expected by the analog wireless device 110. For example, the analog transmitter 150 can transmit to a radio in a radio frequency in the AM or FM band, to a television in a television frequency or channel, or to wireless speakers and headphones in the 900 Mhz frequency band. Alternatively, where the end device is a wireline device that receives a transmitted signal, such as a cable television, the analog transmitter 150 transmits an analog output signal to a wireline device instead of distributing the analog audio signal and the analog video signal in step 510. One of ordinary skill in the art will also readily extend the implementation to transmit the analog audio signal, analog video signal or analog wireless output signal to multiple devices, as desired for the application at hand.

It should be appreciated that the invention described herein provides the capability of playing digital audio and/or video with a device designed to receive a different form of input. The present invention has been described above with reference to preferred embodiments. However, those skilled in the art will recognize that changes and modifications may be made in these preferred embodiments without departing from the scope of the present invention. For example, one of ordinary skill in the art will recognize circumstances where the components of the audio circuit 120 and the video circuit 140 may be differently arranged such that the functions performed

thereby will be performed in a different order, as desired. Changes and modifications which are obvious to those skilled in the art are intended to be included within the scope of the present invention.

5

What is claimed is:

CLAIMS

1. A system for distributing audio content of a digital audio signal to an analog wireline device,
5 comprising:

an audio input interface receiving the digital audio signal and identifying an audio bitstream;

10 an audio decoding unit connected to the audio input interface and decoding the audio bitstream;

an audio digital to analog converter connected to the audio decoding unit and converting the audio
15 bitstream to an analog audio signal; and

an audio output interface connected to the audio digital to analog converter and distributing the analog audio signal to the analog wireline device.
20

2. The system of claim 1, further comprising an audio digital decryption unit connected to the audio input interface and decrypting the audio bitstream.
25

3. The system of claim 1, further comprising an audio analog decryption unit connected to the audio digital to analog converter and decrypting the analog
30 audio signal.

4. The system of claim 1 wherein the audio output interface distributes the analog audio signal to multiple devices.

5

5. The system of claim 1 wherein the audio input interface receives the digital audio signal from a network.

10

6. The system of claim 1 wherein the audio input interface receives the digital audio signal from a local storage device.

15

7. The system of claim 1 wherein the audio input interface receives the digital audio signal produced by a text-to-speech application.

20

8. The system of claim 1 wherein the audio input interface receives the digital audio signal produced by a digital musical instrument.

9. A system for distributing video content of a digital video signal to an analog wireline device, comprising:

5

a video input interface receiving the digital video signal and identifying a video bitstream;

10 a video decoding unit connected to the video input interface and decoding the video bitstream;

15 a video digital to analog converter connected to the video decoding unit and converting the video bitstream to an analog video signal; and

15

a video output interface connected to the video digital to analog converter and distributing the analog video signal to the analog wireline device.

20

10. The system of claim 9, further comprising a video digital decryption unit connected to the video input interface and decrypting the video bitstream.

25

11. The system of claim 9, further comprising a video analog decryption unit connected to the video digital to analog converter and decrypting the analog video signal.

30

12. The system of claim 9 wherein the video output interface distributes the analog video signal to multiple devices.

5

13. The system of claim 9 wherein the video input interface receives the digital video signal from a network.

10

14. The system of claim 9 wherein the video input interface receives the digital video signal from a local storage device.

15

15. The system of claim 9 wherein the video input interface receives the digital video signal produced by a digital video camera.

16. A system for distributing audio and video
content of a digital audio signal and a digital video
5 signal to an analog wireline device, comprising:

an audio input interface receiving the digital audio
signal and identifying an audio bitstream;

10 an audio decoding unit connected to the audio input
interface and decoding the audio bitstream;

an audio digital to analog converter connected to
the audio decoding unit and converting the audio
15 bitstream to an analog audio signal;

an
audio output interface connected to the audio digital to
analog converter and distributing the analog audio signal
20 to the analog wireline device;

a video input interface receiving the digital video
signal and identifying a video bitstream;

25 a video decoding unit connected to the video input
interface and decoding the video bitstream;

a video digital to analog converter connected to
the video decoding unit and converting the video
30 bitstream to an analog video signal;

a video output interface connected to the video digital to analog converter and distributing the analog video signal to the analog wireline device; and

5 a synchronization unit connected to the audio output interface and the video output interface and synchronizing the analog audio signal and the analog video signal.

10

17. The system of claim 16, further comprising a splitter receiving a digital input signal and splitting the digital input signal into the digital audio signal and the digital video signal.

15

18. The system of claim 16 wherein the video input interface receives the digital video signal from a network.

20

19. The system of claim 16 wherein the video input interface receives the digital video signal from a local storage device.

25

20. The system of claim 19 wherein the video input interface receives the digital video signal produced by a digital video camera.

30

21. A method for distributing audio content of a digital audio signal to an analog wireline device, comprising the steps of:

5

receiving the digital audio signal and identifying an audio bitstream;

decoding the audio bitstream;

10

converting the audio bitstream to an analog audio signal; and

15 distributing the analog audio signal to the analog wireline device.

22. The method of claim 21, further comprising the steps of decrypting the audio bitstream.

20

23. The method of claim 21, further comprising the steps of decrypting the analog audio signal.

25

24. The method of claim 21 wherein the step of decoding the audio bitstream includes decompressing the audio bitstream.

30

25. A method for distributing video content of a digital video signal to an analog wireline device, comprising the steps of:

5 receiving the digital video signal and identifying a video bitstream;

 decoding the video bitstream;

10 converting the video bitstream to an analog video signal; and

 distributing the analog video signal to the analog wireline device.

15

26. The method of claim 25, further comprising the steps of decrypting the video bitstream.

20

27. The method of claim 25, further comprising the steps of decrypting the analog video signal.

25 28. The method of claim 25 wherein the step of decoding the video bitstream includes decompressing the video bitstream.

29. A method for distributing audio and video content of a digital audio signal and a digital video signal to an analog wireline device, comprising the steps of:

5 receiving the digital audio signal and identifying an audio bitstream;

 decoding the audio bitstream;

10 converting the audio bitstream to an analog audio signal;

 receiving the digital video signal and identifying a video bitstream;

15 decoding the video bitstream;

 converting the video bitstream to an analog video signal; and

20 distributing the analog audio signal and the analog video signal to the analog wireline device.

25 30. The method of claim 29, further comprising the steps of:

 receiving a digital input signal as an integrated digital input signal; and

30 splitting the digital input signal into the digital audio signal and the digital video signal.

1. **Introduction**
 2. **Background**
 3. **Methodology**
 4. **Results**
 5. **Discussion**
 6. **Conclusion**
 7. **References**
 8. **Appendix**
 9. **Figure 1**
 10. **Figure 2**
 11. **Figure 3**
 12. **Figure 4**
 13. **Figure 5**
 14. **Figure 6**
 15. **Figure 7**
 16. **Figure 8**
 17. **Figure 9**
 18. **Figure 10**
 19. **Figure 11**
 20. **Figure 12**
 21. **Figure 13**
 22. **Figure 14**
 23. **Figure 15**
 24. **Figure 16**
 25. **Figure 17**
 26. **Figure 18**
 27. **Figure 19**
 28. **Figure 20**
 29. **Figure 21**
 30. **Figure 22**
 31. **Figure 23**
 32. **Figure 24**
 33. **Figure 25**
 34. **Figure 26**
 35. **Figure 27**
 36. **Figure 28**
 37. **Figure 29**
 38. **Figure 30**
 39. **Figure 31**
 40. **Figure 32**
 41. **Figure 33**
 42. **Figure 34**
 43. **Figure 35**
 44. **Figure 36**
 45. **Figure 37**
 46. **Figure 38**
 47. **Figure 39**
 48. **Figure 40**
 49. **Figure 41**
 50. **Figure 42**
 51. **Figure 43**
 52. **Figure 44**
 53. **Figure 45**
 54. **Figure 46**
 55. **Figure 47**
 56. **Figure 48**
 57. **Figure 49**
 58. **Figure 50**
 59. **Figure 51**
 60. **Figure 52**
 61. **Figure 53**
 62. **Figure 54**
 63. **Figure 55**
 64. **Figure 56**
 65. **Figure 57**
 66. **Figure 58**
 67. **Figure 59**
 68. **Figure 60**
 69. **Figure 61**
 70. **Figure 62**
 71. **Figure 63**
 72. **Figure 64**
 73. **Figure 65**
 74. **Figure 66**
 75. **Figure 67**
 76. **Figure 68**
 77. **Figure 69**
 78. **Figure 70**
 79. **Figure 71**
 80. **Figure 72**
 81. **Figure 73**
 82. **Figure 74**
 83. **Figure 75**
 84. **Figure 76**
 85. **Figure 77**
 86. **Figure 78**
 87. **Figure 79**
 88. **Figure 80**
 89. **Figure 81**
 90. **Figure 82**
 91. **Figure 83**
 92. **Figure 84**
 93. **Figure 85**
 94. **Figure 86**
 95. **Figure 87**
 96. **Figure 88**
 97. **Figure 89**
 98. **Figure 90**
 99. **Figure 91**
 100. **Figure 92**
 101. **Figure 93**
 102. **Figure 94**
 103. **Figure 95**
 104. **Figure 96**
 105. **Figure 97**
 106. **Figure 98**
 107. **Figure 99**
 108. **Figure 100**
 109. **Figure 101**
 110. **Figure 102**
 111. **Figure 103**
 112. **Figure 104**
 113. **Figure 105**
 114. **Figure 106**
 115. **Figure 107**
 116. **Figure 108**
 117. **Figure 109**
 118. **Figure 110**
 119. **Figure 111**
 120. **Figure 112**
 121. **Figure 113**
 122. **Figure 114**
 123. **Figure 115**
 124. **Figure 116**
 125. **Figure 117**
 126. **Figure 118**
 127. **Figure 119**
 128. **Figure 120**
 129. **Figure 121**
 130. **Figure 122**
 131. **Figure 123**
 132. **Figure 124**
 133. **Figure 125**
 134. **Figure 126**
 135. **Figure 127**
 136. **Figure 128**
 137. **Figure 129**
 138. **Figure 130**
 139. **Figure 131**
 140. **Figure 132**
 141. **Figure 133**
 142. **Figure 134**
 143. **Figure 135**
 144. **Figure 136**
 145. **Figure 137**
 146. **Figure 138**
 147. **Figure 139**
 148. **Figure 140**
 149. **Figure 141**
 150. **Figure 142**
 151. **Figure 143**
 152. **Figure 144**
 153. **Figure 145**
 154. **Figure 146**
 155. **Figure 147**
 156. **Figure 148**
 157. **Figure 149**
 158. **Figure 150**
 159. **Figure 151**
 160. **Figure 152**
 161. **Figure 153**
 162. **Figure 154**
 163. **Figure 155**
 164. **Figure 156**
 165. **Figure 157**
 166. **Figure 158**
 167. **Figure 159**
 168. **Figure 160**
 169. **Figure 161**
 170. **Figure 162**
 171. **Figure 163**
 172. **Figure 164**
 173. **Figure 165**
 174. **Figure 166**
 175. **Figure 167**
 176. **Figure 168**
 177. **Figure 169**
 178. **Figure 170**
 179. **Figure 171**
 180. **Figure 172**
 181. **Figure 173**
 182. **Figure 174**
 183. **Figure 175**
 184. **Figure 176**
 185. **Figure 177**
 186. **Figure 178**
 187. **Figure 179**
 188. **Figure 180**
 189. **Figure 181**
 190. **Figure 182**
 191. **Figure 183**
 192. **Figure 184**
 193. **Figure 185**
 194. **Figure 186**
 195. **Figure 187**
 196. **Figure 188**
 197. **Figure 189**
 198. **Figure 190**
 199. **Figure 191**
 200. **Figure 192**
 201. **Figure 193**
 202. **Figure 194**
 203. **Figure 195**
 204. **Figure 196**
 205. **Figure 197**
 206. **Figure 198**
 207. **Figure 199**
 208. **Figure 200**
 209. **Figure 201**
 210. **Figure 202**
 211. **Figure 203**
 212. **Figure 204**
 213. **Figure 205**
 214. **Figure 206**
 215. **Figure 207**
 216. **Figure 208**
 217. **Figure 209**

Abstract of the Disclosure

10

15

20

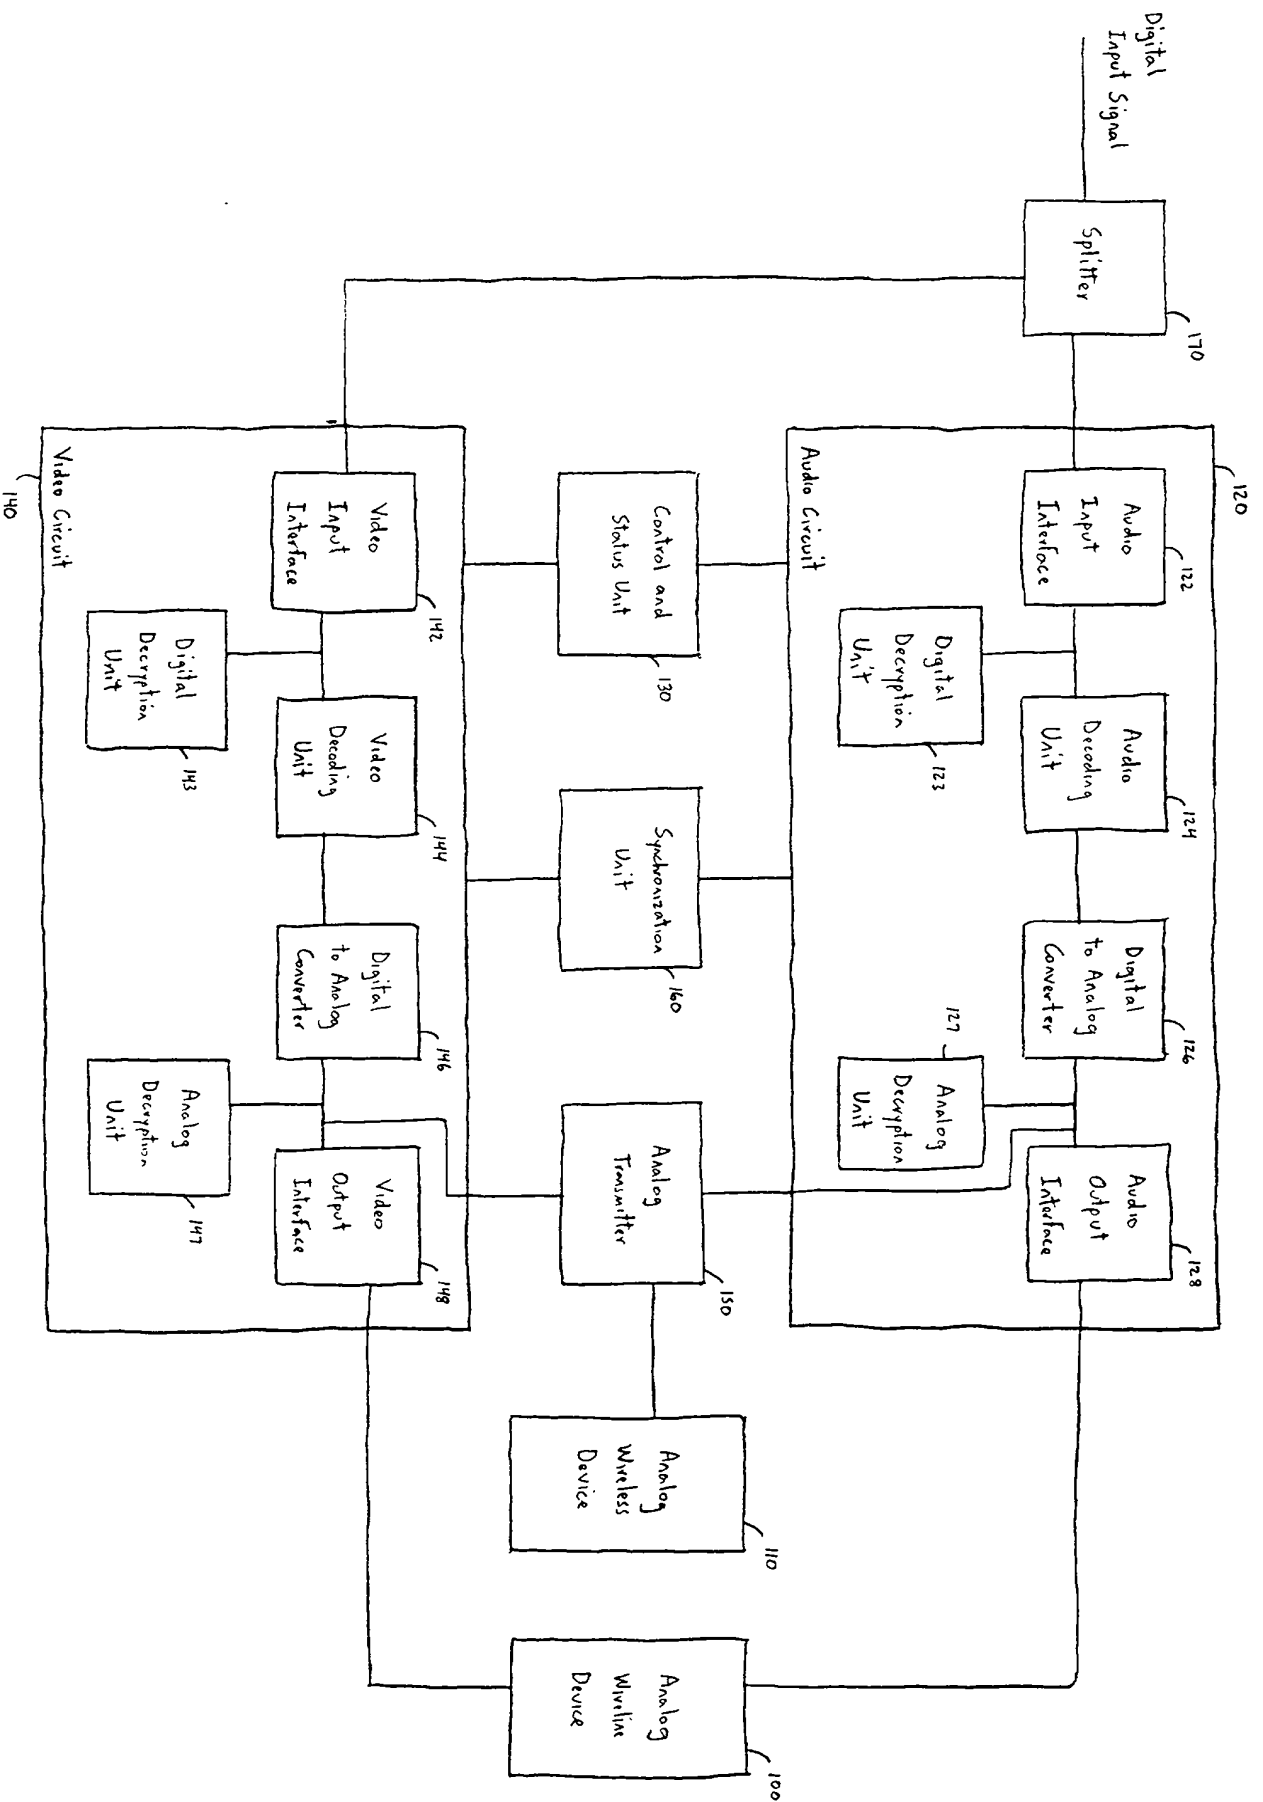


FIG. 1

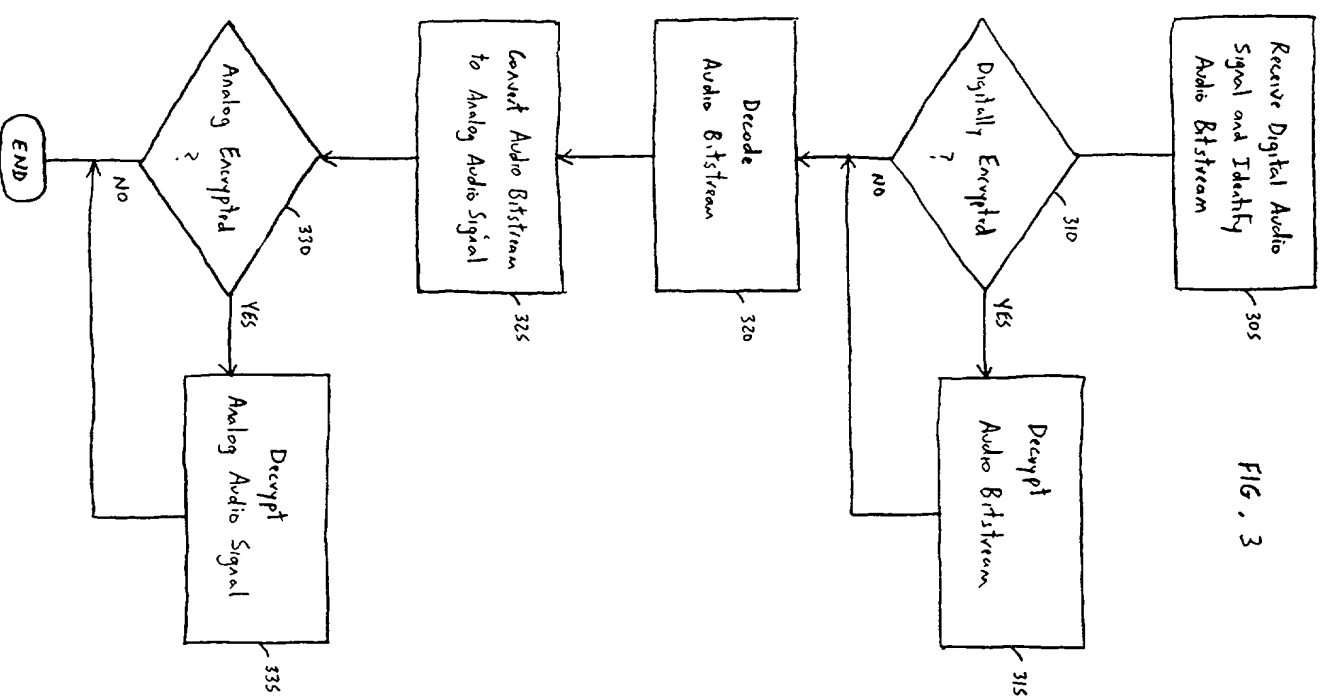
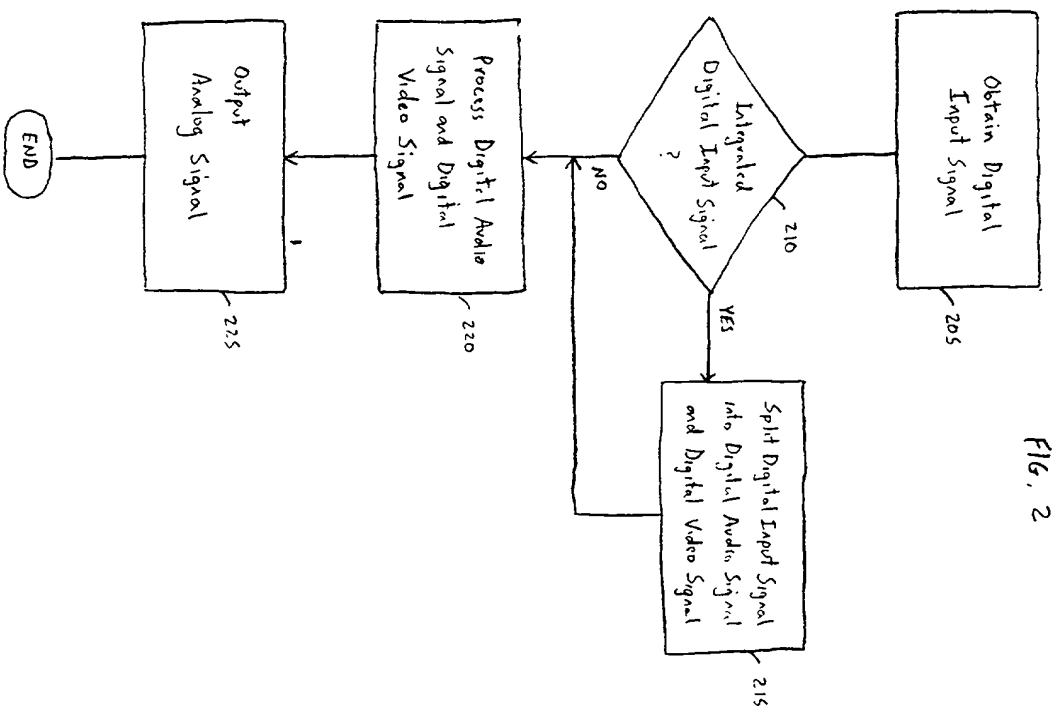


FIG. 5


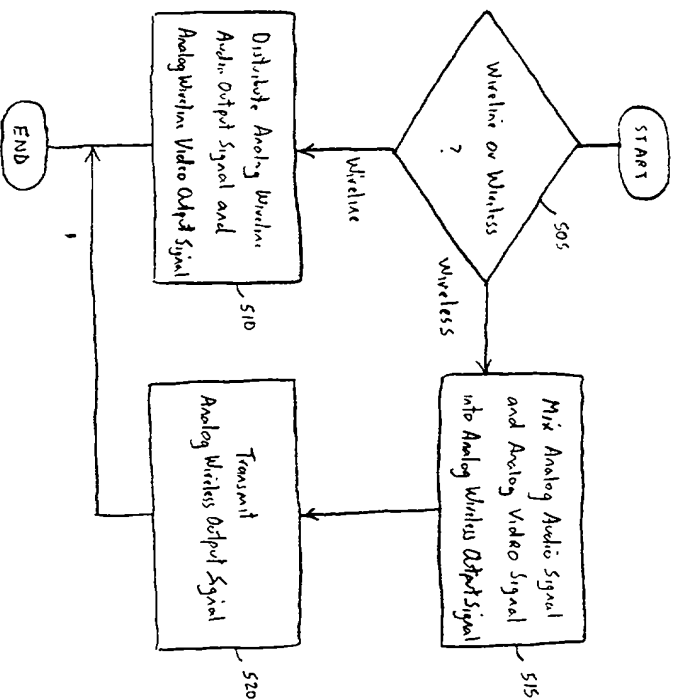


FIG. 4

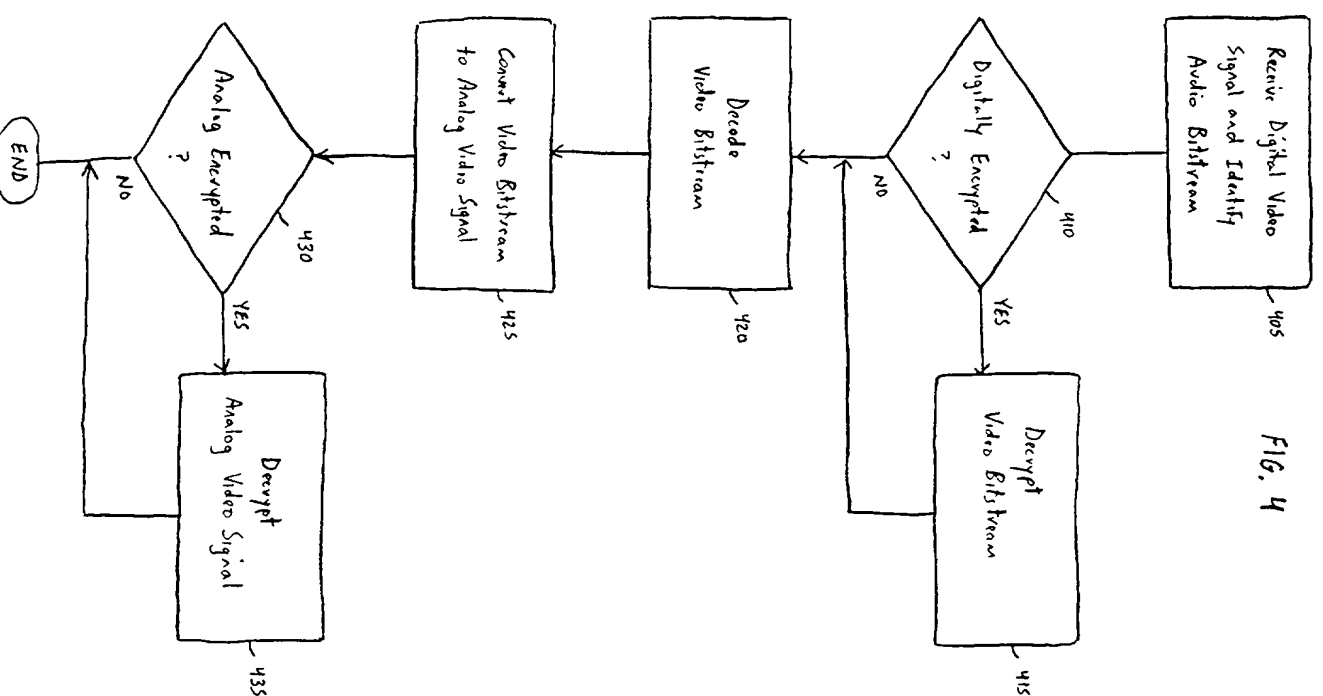

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

Attorney Docket MCG00215

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND SYSTEM FOR DISTRIBUTING DIGITAL AUDIO AND VIDEO TO AN ANALOG WIRELESS DEVICE, the specification of which is attached hereto unless the following box is checked:

☐ Application was filed on _____
as Application No. _____
and was amended on _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Claimed
			<input type="checkbox"/> Yes <input type="checkbox"/> No
(Number)	(Country)	(Day/Month/Year Filed)	
(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available

between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)


I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:


Maurice (Jay) Jones, Reg. No. 25,991; Frank J. Bogacz, Reg. No. 29,047; Bradley J. Botsch, Reg. No. 34,552; Gregory J. Gorrie, Reg. No. 36,530; Walter W. Nielsen, Reg. No. 25,539; Harold Clayton McGurk IV, Reg. No. 34,964; Sherry Jeanne Whitney, Reg. No. 39,422; Dana B. LeMoine, Reg. No. 40,062; Jennifer B. Wuamett, Reg. No. 40,878; John C. Scott, Reg. No. 38,613.

Address all telephone calls to Mr. S. Kevin Pickens at telephone no. (602) 441-4207.

Address all correspondence to Maurice J. Jones, Motorola, Inc., Intellectual Property Department - Suite R3108, P.O. Box 10219, Scottsdale, Arizona 85271-0219.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST INVENTOR FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE
Jurgen Reinold		4/20/98
RESIDENCE	CITIZENSHIP	
12003 S. 46th Street, Phoenix, AZ 85044	German	
POST OFFICE ADDRESS		
Same as above		

FULL NAME OF SECOND INVENTOR FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE
David Knappenberger		4/20/98
RESIDENCE	CITIZENSHIP	
1611 N. McAllister, Tempe, AZ 85281	United States	
POST OFFICE ADDRESS		
Same as above		


FULL NAME OF THIRD INVENTOR FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE
Mathew Cucuzella	<i>Mathew Cucuzella</i>	4-20-98
RESIDENCE	CITIZENSHIP	
3719 W. Mauna Loa Lane, Phoenix, AZ 85023	United States	
POST OFFICE ADDRESS		
Same as above		



FULL NAME OF FOURTH INVENTOR FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE
Jack Scott Geranen	<i>Jack Scott Geranen</i>	4-20-98
RESIDENCE	CITIZENSHIP	
14648 S. 24th Street, Phoenix, AZ 85048	United States	
POST OFFICE ADDRESS		
Same as above		


FULL NAME OF FIFTH INVENTOR FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE
Jeff Lee	<i>Jeff Lee</i>	4/20/98
RESIDENCE	CITIZENSHIP	
3711 E. Campbell Avenue, Phoenix, AZ 85018	United States	
POST OFFICE ADDRESS		
Same as above		

FULL NAME OF SIXTH INVENTOR FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE
Michael E. Williams	<i>Michael E. Williams</i>	4/20/98
RESIDENCE	CITIZENSHIP	
1132 E. Ken Place, Chandler, AZ 85225	United States	
POST OFFICE ADDRESS		
Same as above		

FIG. 1

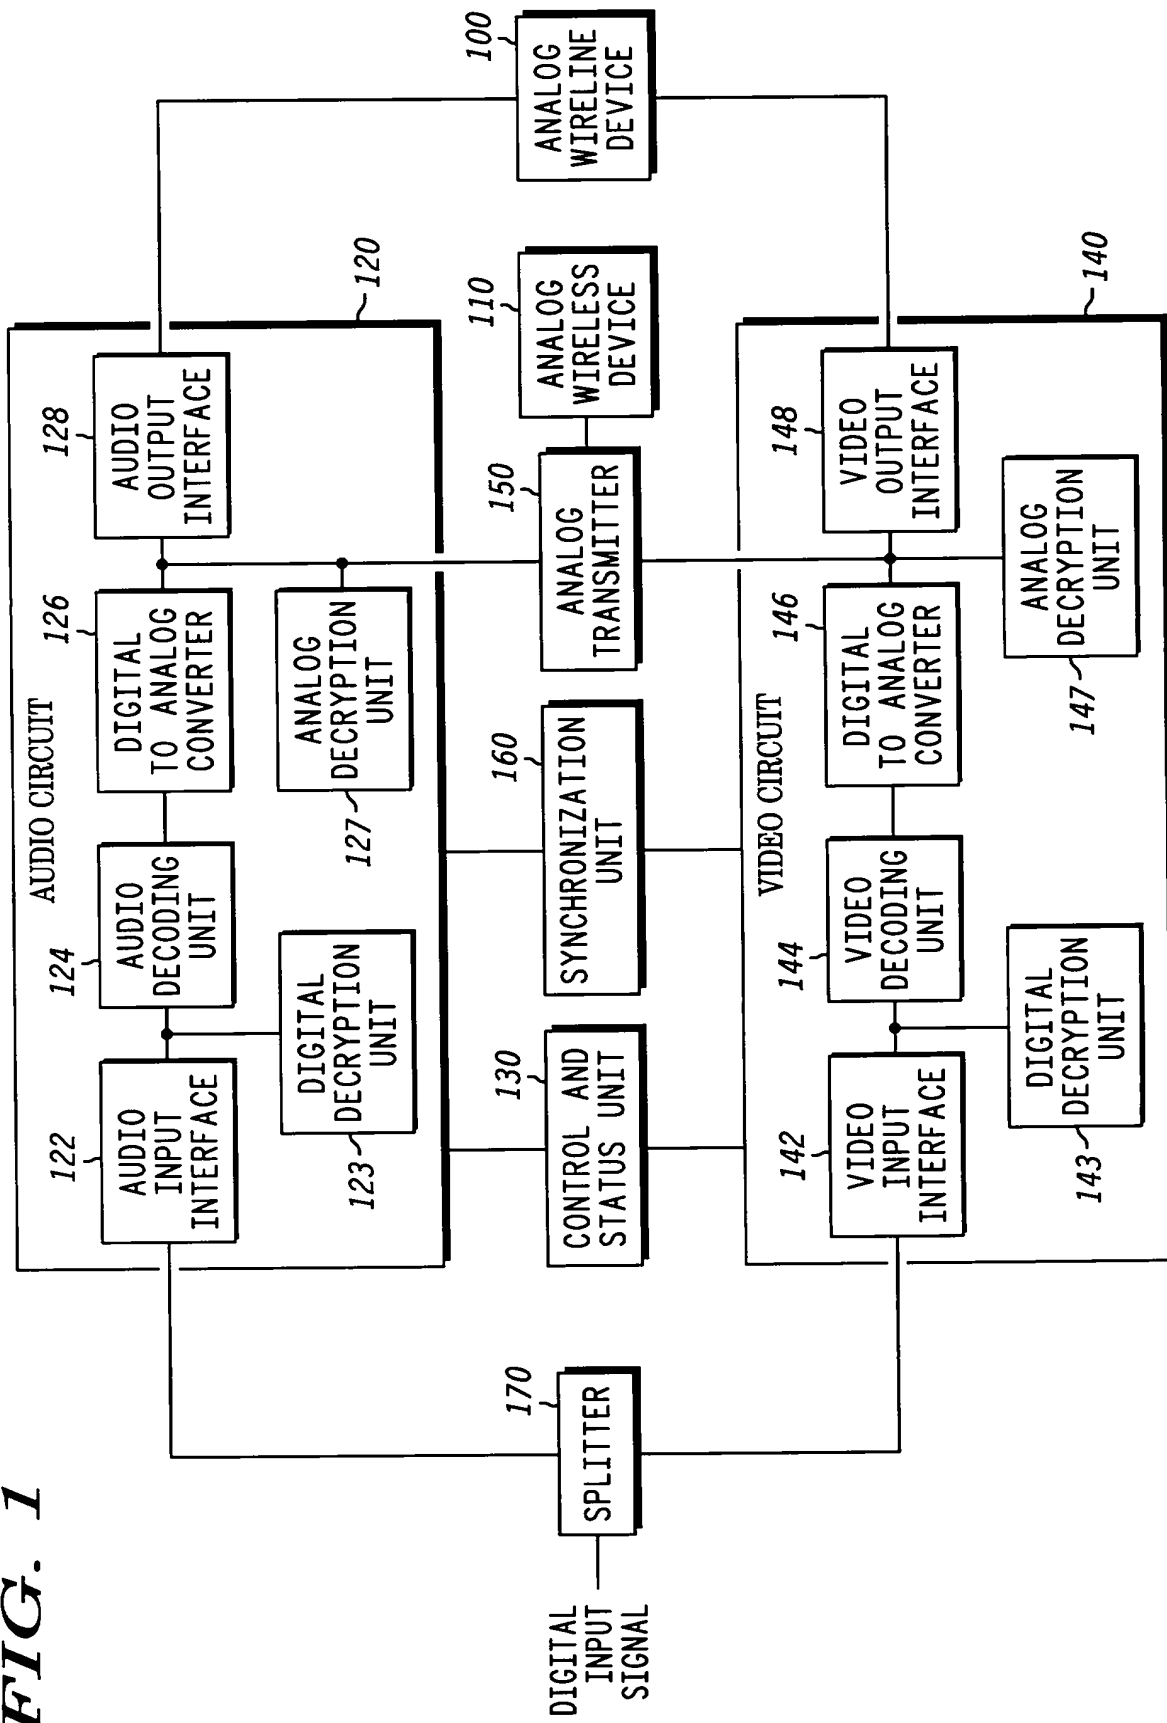

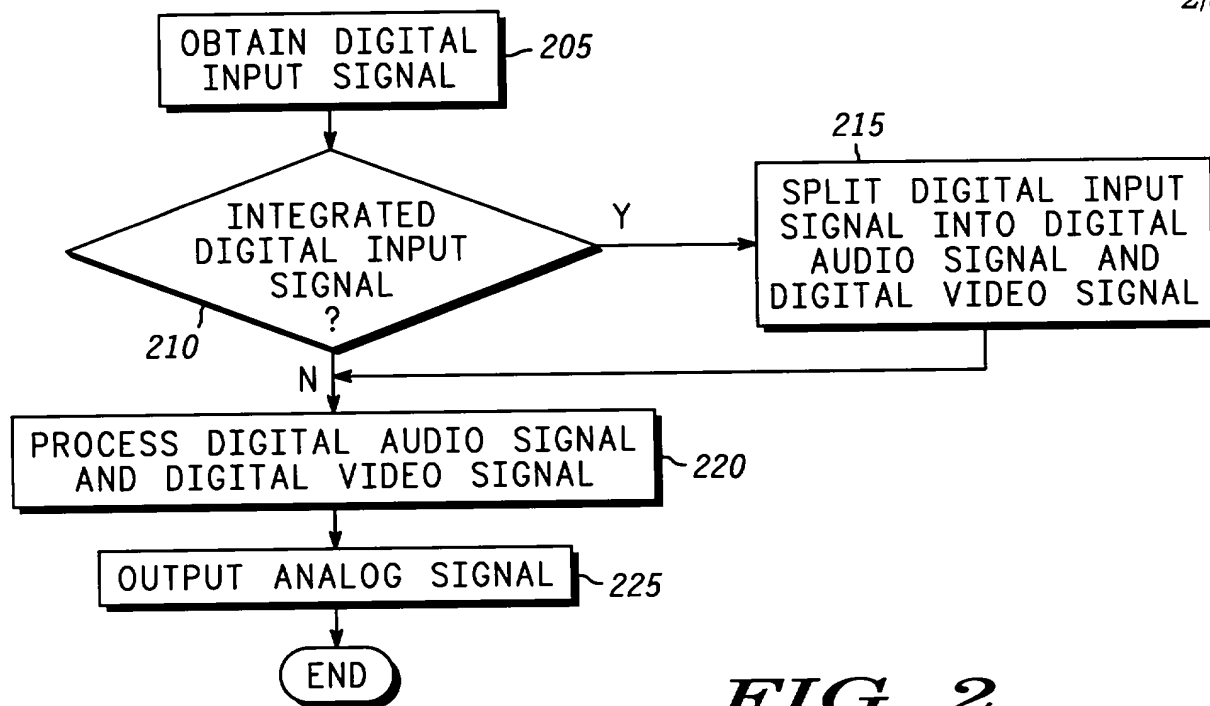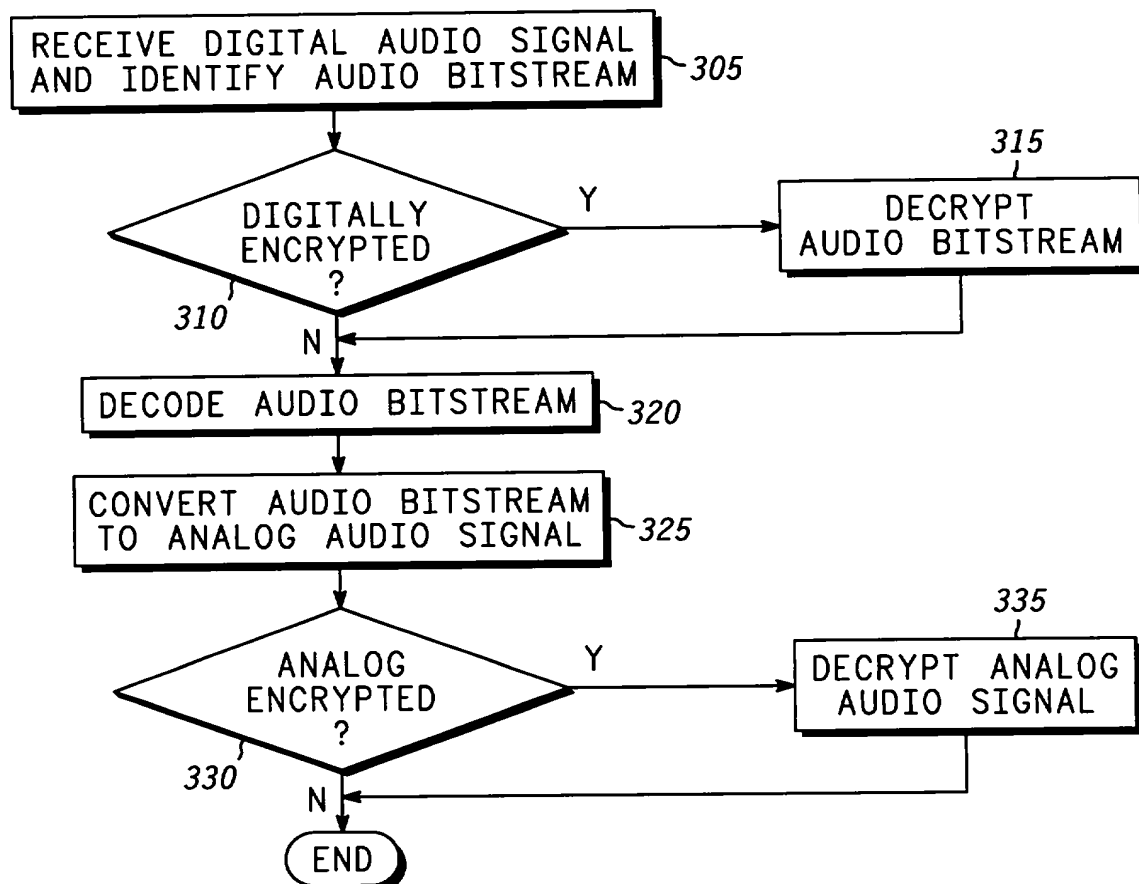*FIG. 2**FIG. 3*

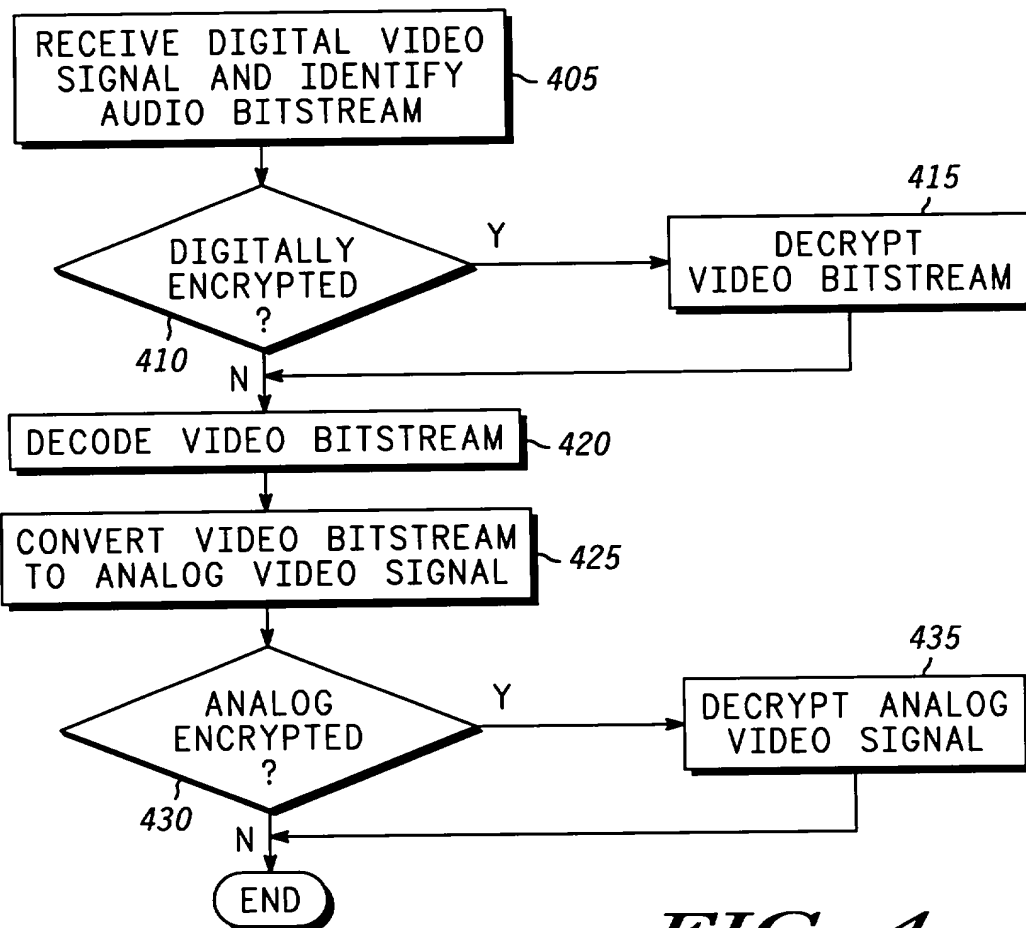**FIG. 4****FIG. 5**